


# Meraki Dual-Band Patch Antenna, 8 / 6.5 dBi (MA-ANT-25)

The Cisco Meraki MA-ANT-25 patch antenna is a 8 / 6.5 dBi, MIMO, dual-band 2.4 and 5 GHz antenna ideal for providing client coverage over focused areas or creating backhaul links. It is designed for use with Meraki APs that have N-type connectors.



## Signal Coverage Pattern

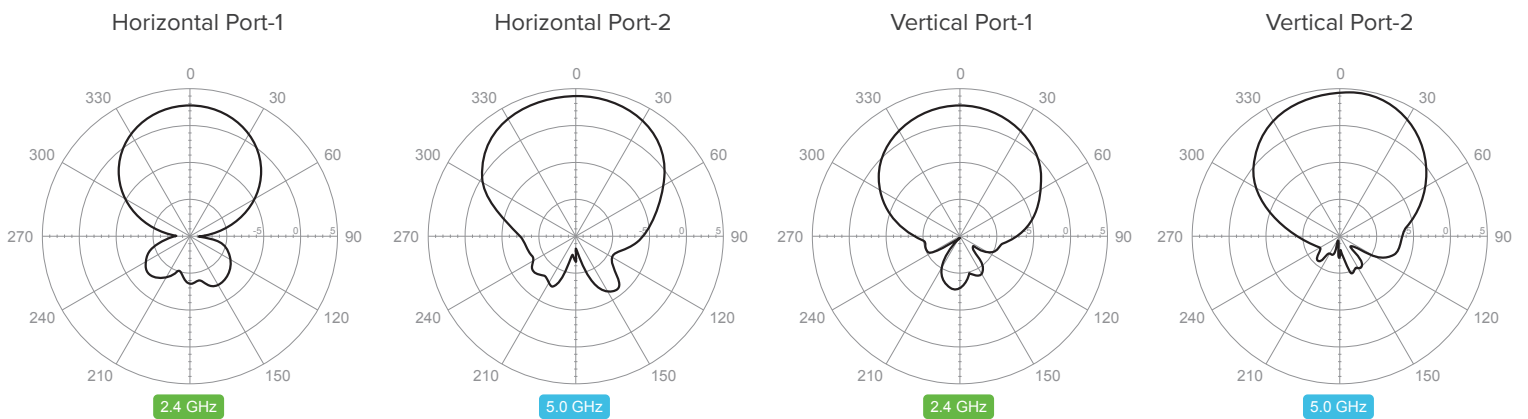

## Specifications

### Electrical

Antenna type: sector  
 Frequency range: 2.400 – 2.500, 5.150 – 5.875 GHz  
 Gain: 8 / 6.5 dBi  
 Polarization: linear, vertical / horizontal  
 Half power beamwidth / horizontal: 60° / 75°

### Cables

Cables with two N-type connectors included  
 Cable length: 12 inches

### Mounting

Mounting hardware and cables included  
 Mounts to walls and poles

### Physical and Environmental

Dimensions: 7.1 x 7.1 x 1.6" (180 mm x 180 mm x 1.8 mm)  
 Weight: 1.1 lbs (512 g)  
 Material: UV resistant plastic  
 Temperature: -40° F – 158° F (-40° C – 70° C)  
 Connector: 2 x N-type

### Warranty

1 year hardware warranty included

### Regulatory

Certified for use with the MR72, MR74, MR76, MR84, MR86